

Magnetic Buzzer

MCW9650




DIMENSIONS

UNIT:mm


Tolerance: ± 0.5 mm

Wave Solderable and Washable

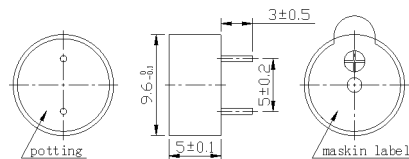

SPECIFICATIONS

FREQUENCY RESPONSE

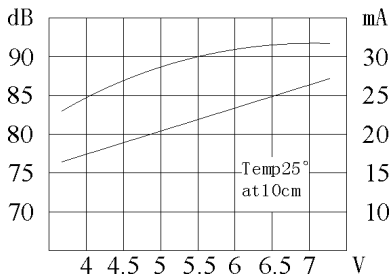

Type	Unit	MCW9650-3V	MCW9650-5V	MCW9650-12V
Rated Voltage	V	3.0	5.0	5
Operating Voltage	V	2~5	4~7	3-7
*Rated Current(MAX)	mA	30	30	30
*Min Sound Output at 10 cm	dB	80	82	85
*Resonant Frequency	Hz	2500 \pm 400/3100 \pm 400		
Operating Temperature	$^{\circ}$ C	-20 ~ +70		
Storage Temperature	$^{\circ}$ C	-30 ~ +80		
Housing Material		PBT		
Weight	g	0.84		

*Value Applying at Rated Voltage(DC)