

Magnetic Transducer


MES12075



DIMENSIONS


UNIT:mm

Tolerance: ± 0.5 mm

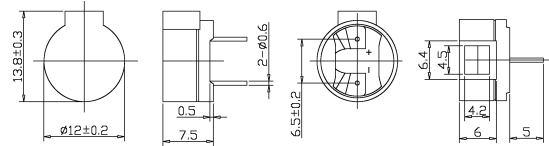

SPECIFICATIONS

FREQUENCY RESPONSE

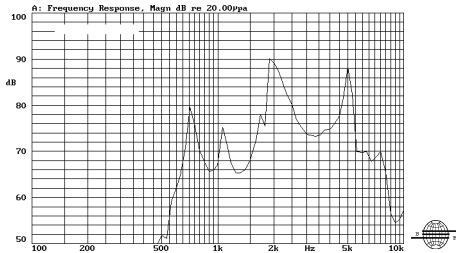

Type	Unit	MES12075-6.5R-2048	MES12075-6.5R-2731	MES12075-16R-2048
Rated Voltage	V	1.5	1.5	1.5
Operating Voltage	V	1~3	1~3	1~3
*Rated Current(MAX)	mA	70	70	30
*Min Sound Output at 10 cm	dB	80	88	80
Coil Resistance	Ω	6.5 ± 1	6.5 ± 1	16 ± 4
*Resonant Frequency	Hz	2048	2731	2048
Operating Temperature	$^{\circ}\text{C}$	-20 ~ +70		
Storage Temperature	$^{\circ}\text{C}$	-30 ~ +85		
Housing Material		NORYL		
Weight	g	2		

*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)