


Magnetic Transducer

MMES9668




FREQUENCY RESPONSE

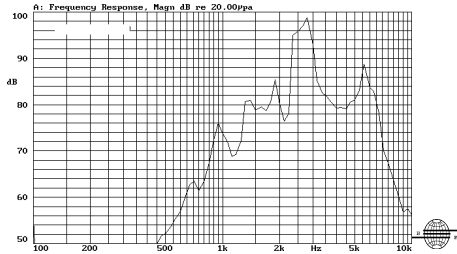

DIMENSIONS

UNIT:mm

Tolerance: ± 0.5 mm

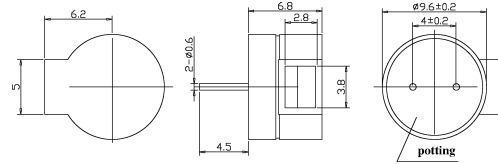

SPECIFICATIONS

Type	Unit	MMES9668-5	MMES9668-25R	MMES9668-40R
Rated Voltage	V	5R	3	5
Operating Voltage	V	1.5	2~4	4~6
*Rated Current(MAX)	mA	1~3	60	60
*Min Sound Output at 10 cm	dB	80	85	85
Coil Resistance	Ω	85	25 ± 4	40 ± 4
*Resonant Frequency	Hz	5.5 ± 1	2731	
Operating Temperature	$^{\circ}\text{C}$		-20 ~ +70	
Storage Temperature	$^{\circ}\text{C}$		-30 ~ +80	
Housing Material			NORYL	
Weight	g		2	

*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)