


Magnetic Transducer

MW9671




FREQUENCY RESPONSE

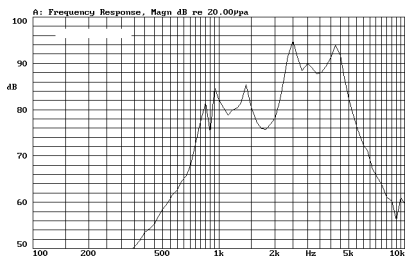

DIMENSIONS

UNIT:mm

Tolerance: $\pm 0.5\text{mm}$

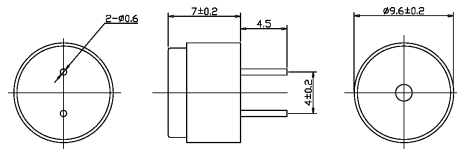

SPECIFICATIONS

| Type | Unit | MW9671-5.5R | MW9671-25R | MW9671-40R |
|----------------------------|--------------------|-------------|------------|------------|
| Rated Voltage | V | 1.5 | 3 | 5 |
| Operating Voltage | V | 1~3 | 2~4 | 3~8 |
| *Rated Current(MAX) | mA | 80 | 60 | 60 |
| *Min Sound Output at 10 cm | dB | 85 | 85 | 85 |
| Coil Resistance | Ω | 5.5 ± 1 | 25 ± 3 | 40 ± 4 |
| *Resonant Frequency | Hz | 2731/3100 | | |
| Operating Temperature | $^{\circ}\text{C}$ | -20 ~ +70 | | |
| Storage Temperature | $^{\circ}\text{C}$ | -30 ~ +80 | | |
| Housing Material | | NORYL | | |
| Weight | g | 1 | | |

*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)