



PiezoTransducer

P13025W



DIMENSIONS


UNIT:mm
Tolerance:± 0.5mm



SPECIFICATIONS

Type	Unit	P13025W-15C-4800
Rated Voltage(Square Wave)	Vp-p	10
Operating Voltage	Vp-p	1~30
*Rated Current(MAX)	mA	5
*Min Sound Output at 4 KHz/ 10 cm	dB	80
*Resonant Frequency	Hz	4800 ± 500
Capacitance at 120Hz	pF	15000 ± 30%
Lead Wire		UL1571 AWG32
Operating Temperature	°C	-20 ~ +70
Storage Temperature	°C	-30 ~+75
Housing Material		ABS
Weight	g	1

FREQUENCY RESPONSE

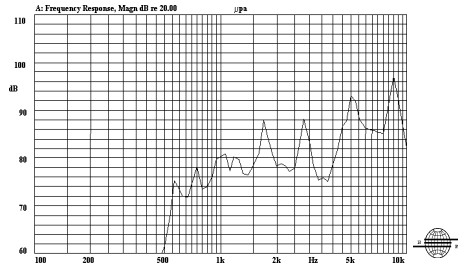

*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)