


# Piezo Transducer

## P13065



### DIMENSIONS


UNIT:mm  
 Tolerance: ± 0.5mm  
 500PCS/1 PACK

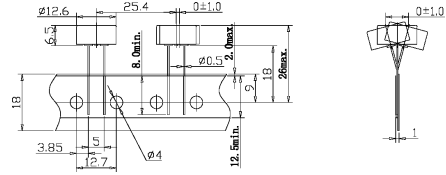

### SPECIFICATIONS

Type	Unit	P13065-12C-400
Rated Voltage(Square Wave)	Vp-p	3
Operating Voltage	Vp-p	1~25
*Rated Current(MAX)	mA	2
*Min Sound Output at 4.0KHz/10 cm	dB	70
*Resonant Frequency	Hz	4000 ± 500
Capacitance at 120Hz	pF	12000 ± 30%
Lead Pin Material	Phosphor Bronze	
Operating Temperature	°C	-20 ~ +70
Storage Temperature	°C	-30 ~ +80
Housing Material	NORYL	
Weight	g	1

### FREQUENCY RESPONSE

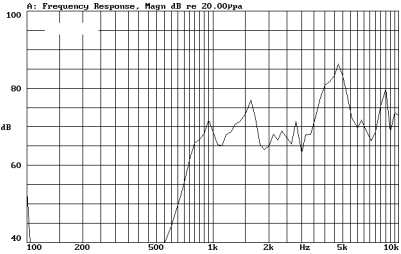

\*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)