



# PiezoTransducer

## P14040W




### DIMENSIONS

UNIT:mm  
Tolerance:  $\pm 0.5$ mm

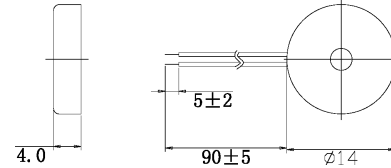

### SPECIFICATIONS

### FREQUENCY RESPONSE

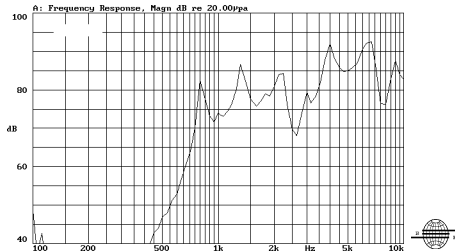

Type	Unit	P14040W-15C-4800
Rated Voltage(Square Wave)	Vp-p	10
Operating Voltage	Vp-p	1~30
*Rated Current(MAX)	mA	2
*Min Sound Output at 4.8KHz/10 cm	dB	85
*Resonant Frequency	Hz	4800 $\pm$ 500
Capacitance at 120Hz	pF	15000 $\pm$ 30%
Lead Wire		UL1571 AWG30
Operating Temperature	°C	-20 ~ +70
Storage Temperature	°C	-30 ~ +80
Housing Material		NORYL
Weight	g	1