



# Piezo Transducer

## P1616025



### DIMENSIONS:


UNIT:mm±0.3  
 600PCS/1 PACK



### SPECIFICATIONS:

TYPE	Unit	P1616025-14C-4000
Rated Voltage(Square wave)	Vp-p	3.0
Operating Voltage	Vp-p	1.0~25.0
*Rated Current(MAX)	mA	3.0
*Min Sound Output at 4.1KHz/10cn	dB	70.0
*Resonant Frequency	Hz	4000±500
Capacitance at 1KHz	pF	14000±30%
Lead Pin Material		Red Copper
Operating Temperature	℃	-20 ~ +70
Storage Temperature	℃	-30 ~ +80
Housing Material		PPS
Weight	g	0.9

### FREQUENCY RESPONSE

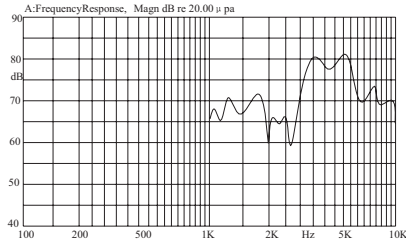

\*Value Applying at Rated Voltage(resonant frequency,1/2 duty, square wave)