


# Piezo Transducer

## P17080




### FREQUENCY RESPONSE

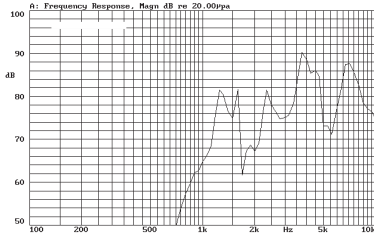

### DIMENSIONS:

UNIT:mm  
Tolerance:  $\pm 0.5$ mm



### SPECIFICATIONS:

TYPE	Unit	P17080-15C-4000
Rated Voltage(Square wave)	Vp-p	5
Operating Voltage	Vp-p	1~30
*Rated Current(MAX)	mA	1
*Min Sound Output at 4.0KHz/10cm	dB	78
*Resonant Frequency	Hz	4000 $\pm$ 500
Capacitance at 120Hz	pF	15000 $\pm$ 30%
Lead Pin Material		Phosphor Bronze
Operating Temperature	$^{\circ}$ C	-20 ~ +70
Storage Temperature	$^{\circ}$ C	-30 ~ +80
Housing Material		NORYL
Weight	g	1

\*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)