


Piezo Transducer

P17098



DIMENSIONS:


UNIT:mm
Tolerance: ± 0.3 mm



SPECIFICATIONS:

TYPE	Unit	P17098-25C-2000
Rated Voltage(Square wave)	Vp-p	5.0
Operating Voltage	Vp-p	2.0~25.0
*Rated Current(MAX)	mA	3.0
*Min Sound Output at 2.0KHz/10cm	dB	75
*Resonant Frequency	Hz	2000 \pm 500
Capacitance at 1KHz	pF	25000 \pm 30%
Lead Pin Material		Red Copper
Operating Temperature	°C	-20 ~ +70
Storage Temperature	°C	-30 ~ +80
Housing Material		NORLY/MPPo
Weight	g	1.2

FREQUENCY RESPONSE

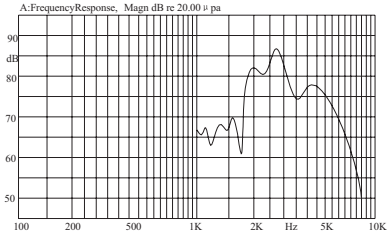

*Value Applying at Rated Voltage(resonant frequency,1/2 duty, square wave)