

Piezo Transducer


P22110



DIMENSIONS


UNIT:mm

Tolerance: ± 0.5mm



SPECIFICATIONS

FREQUENCY RESPONSE

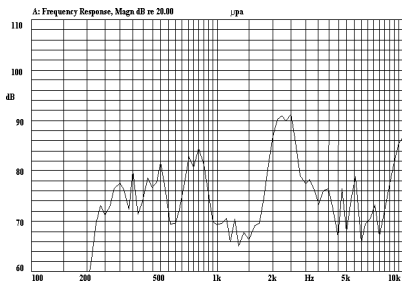

Type	Unit	P22110-20C-2048
Rated Voltage(Square Wave)	Vp-p	12
Operating Voltage	Vp-p	1~30
*Rated Current(MAX)	mA	3
*Min Sound Output at 2.048 KHz/10cm	dB	85
*Resonant Frequency	Hz	2048 ± 500
Capacitance at 120Hz	pF	20000 ± 30%
Lead Pin Material	Phosphor Bronze	
Operating Temperature	℃	-30 ~ +80
Storage Temperature	℃	-40 ~ +80
Housing Material	ABS777	
Weight	g	3

*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)