



Piezo Transducer

P30075



DIMENSIONS:


UNIT:mm
Tolerance:±0.5mm

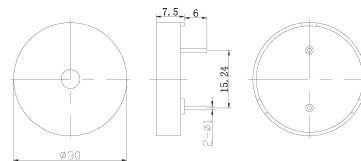

SPECIFICATIONS:

| TYPE | Unit | P30075-18C-2800 |
|----------------------------------|------|-----------------|
| Rated Voltage(Square wave) | Vp-p | 10 |
| Operating Voltage | Vp-p | 1-30 |
| *Rated Current(MAX) | mA | 3 |
| *Min Sound Output at 1.3KHz/10cm | dB | 90 |
| *Resonant Frequency | Hz | 2800±500 |
| Capacitance at 120Hz | pF | 18000±30% |
| Lead wire | | Red Copper |
| Operating Temperature | ℃ | -20 ~ +60 |
| Storage Temperature | ℃ | -30 ~ +70 |
| Housing Material | | ABS |
| Weight | g | 2 |

FREQUENCY RESPONSE

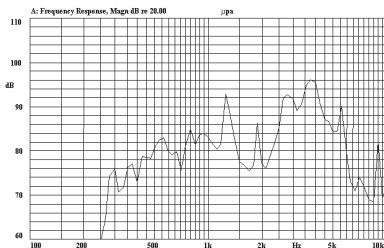

*Value Applying at Rated Voltage(resonant frequency,1/2 duty, square wave)