


Piezo Transducer

P35020W




FREQUENCY RESPONSE

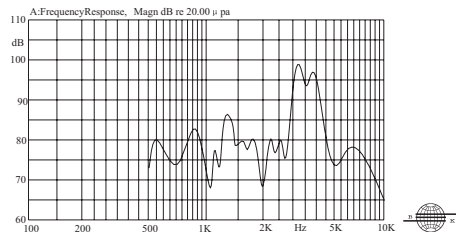

DIMENSIONS:

UNIT:mm ± 0.3



SPECIFICATIONS:

TYPE	Unit	P35020W-45C-1300
Rated Voltage(Square wave)	Vp-p	12.0
Operating Voltage	Vp-p	1.0-30.0
*Rated Current(MAX)	mA	5.0
*Min Sound Output at 1.3KHz/10cm	dB	75
*Resonant Frequency	Hz	1300 \pm 500
Capacitance at 120Hz	pF	45000 \pm 30%
Lead wire		0.8X5 Red and Black wire
Operating Temperature	$^{\circ}$ C	-20 ~ +60
Storage Temperature	$^{\circ}$ C	-30 ~ +70
Housing Material		ABS
Weight	g	1.6

*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)