


Piezo Transducer

PH30050W




FREQUENCY RESPONSE

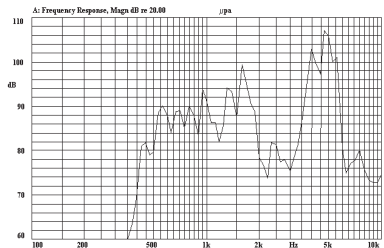

DIMENSIONS:

UNIT:mm
Tolerance: ± 0.5mm



SPECIFICATIONS:

TYPE	Unit	PH30050W-18C-4500
Rated Voltage(Square wave)	Vp-p	5
Operating Voltage	Vp-p	1~30
*Rated Current(MAX)	mA	5
*Min Sound Output at 4.0KHz/10cm	dB	90
*Resonant Frequency	Hz	4500 ± 500
Capacitance at 1KHz	pF	18000 ± 30%
Lead wire	UL1095 AWG28	
Operating Temperature	°C	-20 ~ +60
Storage Temperature	°C	-30 ~ +70
Housing Material	ABS	
Weight	g	4.7

*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)