


Piezo Transducer

PH45040W




DIMENSIONS

UNIT:mm
Tolerance: ± 0.5mm



SPECIFICATIONS

FREQUENCY RESPONSE

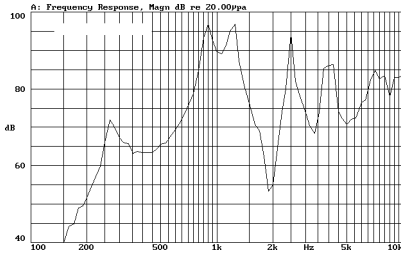

Type	Unit	PH45040W-66C-1200
Rated Voltage(Square Wave)	Vp-p	12
Operating Voltage	Vp-p	1~30
*Rated Current(MAX)	mA	3
*Min Sound Output at 1.2KHz/30 cm	dB	85
*Resonant Frequency	Hz	1200 ± 500
Capacitance at 120Hz	pF	66000 ± 30%
Lead Wire		UL1095 AWG28
Operating Temperature	℃	-20 ~ +60
Storage Temperature	℃	-30 ~ +70
Housing Material		ABS
Weight	g	7

*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)