

Piezo Transducer


PQ272207



DIMENSIONS

UNIT:mm


Tolerance: ± 0.5mm



SPECIFICATIONS

Type	Unit	PQ272207-20C-2000
Rated Voltage(Square Wave)	Vp-p	3
Operating Voltage	Vp-p	1~25
*Rated Current(MAX)	mA	1
*Min Sound Output at 2.0KHz/10 cm	dB	70
*Resonant Frequency	Hz	2000 ± 500
Capacitance at 120Hz	pF	19000 ± 30%
Lead Pin Material		Beryllium Bronze
Operating Temperature	°C	-20 ~ +70
Storage Temperature	°C	-30 ~ +80
Housing Material		NORYL
Weight	g	3

FREQUENCY RESPONSE

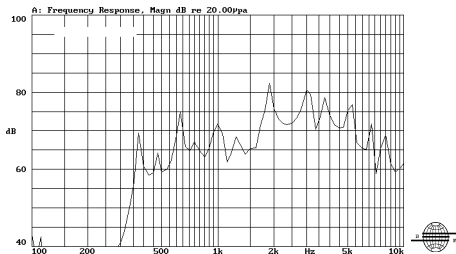

*Value Applying at Rated Voltage(resonant frequency, 1/2 duty, square wave)