SM015S012R005-A

DIMENSIONS

UNIT:mm

Tolerance:± 0.2mm

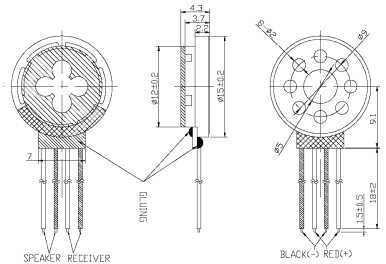

FREQUENCY RESPONSE

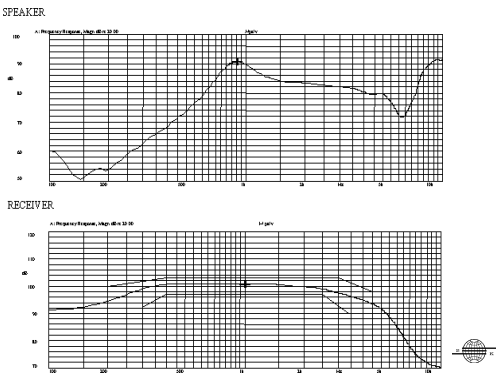

SPECIFICATIONS

SPEAKER			RECEIVER		
Rated Impedance	Ω	8 ± 15%	Rated Impedance	Ω	32 ± 15%
Rated(Max.)Power	W	0.5/0.8	Rated(Max.)Power	mW	10/30
Resonant Frequency	Hz	950 ± 20%	Rated Freq.Range	Hz	300~3400
Rated Freq.Range	Hz	f_0~10000	Sensitivity(at 179mV/1kHz)	dB	100 ± 3
S.P.L@0.1w/0.1m@1kHz	dB	85 ± 3			
Weight	g	1.3			
Operating Temperature	℃	-10~+40			