


Multi Function Devices

SM1018R001




FREQUENCY RESPONSE

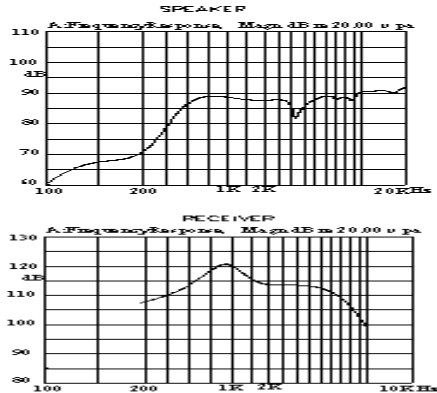

DIMENSIONS

UNIT:mm
Tolerance: ± 0.2mm

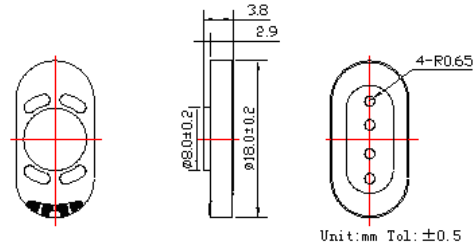

Unit:mm Tol:±0.5

SPECIFICATIONS

SPEAKER			RECEIVER		
Rated Impedance	Ω	8 ± 15%	Rated Impedance	Ω	8 ± 15%
Rated(Max.)Power	W	0.5/1.0	Rated(Max.)Power	mW	10/20
Resonant Frequency	Hz	850 ± 20%	Rated Freq.Range	Hz	200~4000
Rated Freq.Range	Hz	f ₀ -20K	Sensitivity(at 100mV/ 1kHz)	dB	120
S.P.L@0.1w/0.1m@1kHz	dB	88 ± 3			
Weight	g	1.5			
Operating Temperature	°C	-40~+85			