

Multi Function Devices


SM1315R001



DIMENSIONS


UNIT:mm

Tolerance:± 0.2mm

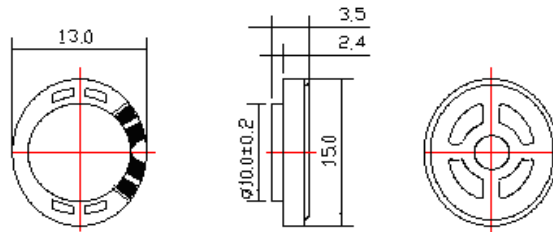

Unit:mm Tol:±0.2

FREQUENCY RESPONSE

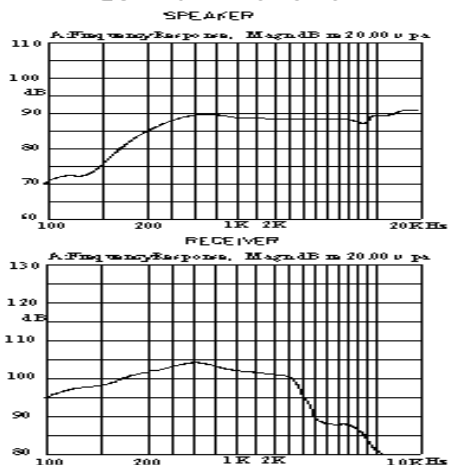

SPECIFICATIONS

SPEAKER			RECEIVER		
Rated Impedance	Ω	8 ± 15%	Rated Impedance	Ω	8 ± 15%
Rated(Max.)Power	W	0.5/1.0	Rated(Max.)Power	mW	10/20
Resonant Frequency	Hz	850 ± 20%	Rated Freq.Range	Hz	200~4000
Rated Freq.Range	Hz	f ₀ -20K	Sensitivity(at 100mV/ 1kHz)	dB	105
S.P.L.@0.1w/0.1m@1kHz	dB	86 ± 3			
Weight	g	1.5			
Operating Temperature	°C	-40~+85			

