

# Receiver


## SM13R002



### DIMENSIONS


UNIT:mm

Tolerance:  $\pm 0.2\text{mm}$

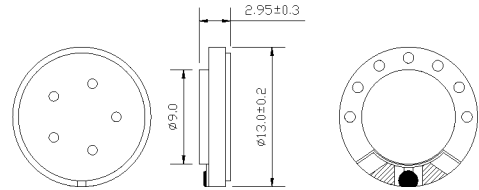

### SPECIFICATIONS

### FREQUENCY RESPONSE

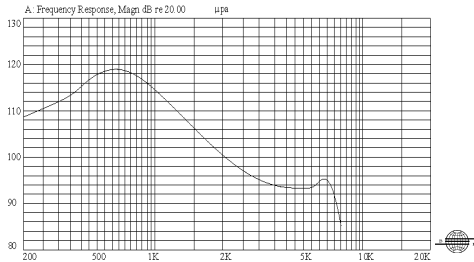

|                             |                    |                           |
|-----------------------------|--------------------|---------------------------|
| Rated Impedance             | $\Omega$           | $32 \pm 15\%$             |
| Rated Input Power           | mW                 | 10                        |
| Maximum Input Power         | mW                 | 30                        |
| Rated Freq.Range            | Hz                 | 300~3400                  |
| Sensitivity                 | dB                 | $113 \pm 3$ at 100mV/1kHz |
| Weight                      | g                  | 1.0                       |
| Operating Temperature Range | $^{\circ}\text{C}$ | -20~+40                   |
| Storage Temperature Range   | $^{\circ}\text{C}$ | -30~+80                   |