

Speaker


SM13S006



DIMENSIONS


UNIT:mm

Tolerance: ± 0.2 mm

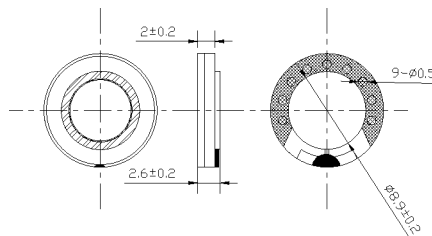

SPECIFICATIONS

FREQUENCY RESPONSE

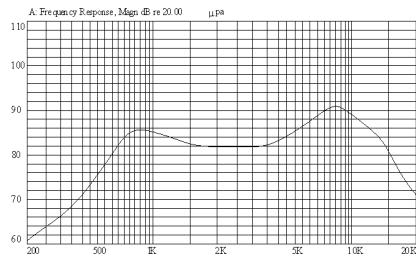

Rated Impedance	Ω	$8 \pm 15\%$
Rated Input Power	W	0.2
Maximum Input Power	W	0.3
Resonant Frequency	Hz	$950 \pm 20\%$
S.P.L.@0.1w/0.1m@1kHz	dB	85 ± 3
Weight	g	1.5
Operating Temperature Range	$^{\circ}\text{C}$	-30~+40
Storage Temperature Range	$^{\circ}\text{C}$	-40~+80