SM15R003

DIMENSIONS

UNIT:mm

Tolerance:± 0.2mm

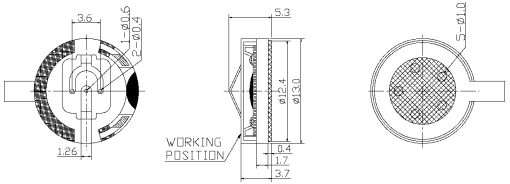

FREQUENCY RESPONSE

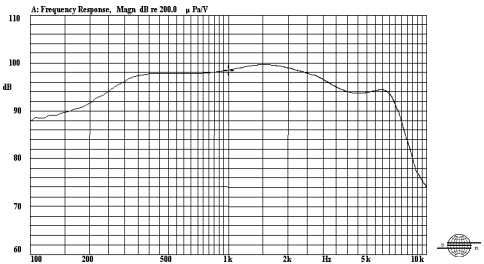

SPECIFICATIONS

Rated Impedance	Ω	32 ± 15%
Rated Input Power	mW	10
Maximum Input Power	mW	30
Rated Freq.Range	Hz	300~3400
Sensitivity	dB	98 ± 3 at 100mV/1kHz
Weight	g	1.2
Operating Temperature Range	℃	-10~+40
Storage Temperature Range	℃	-30~+80