


SM15R007




FREQUENCY RESPONSE

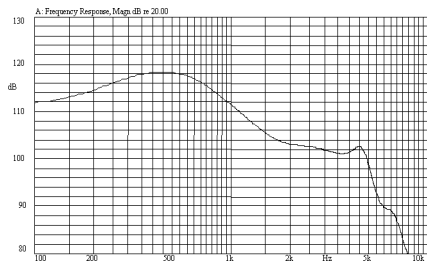

DIMENSIONS

UNIT:mm

Tolerance: ± 0.2 mm

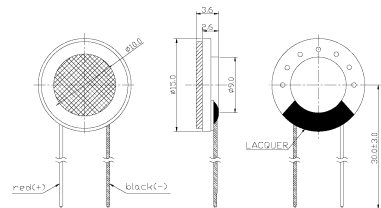

SPECIFICATIONS

Rated Impedance	Ω	$32 \pm 15\%$
Rated Input Power	mW	10
Maximum Input Power	mW	30
Rated Freq. Range	Hz	300~3400
Sensitivity	dB	111 ± 3 at 180mV/1kHz
Weight	g	1.4
Operating Temperature Range	$^{\circ}\text{C}$	-10~+40
Storage Temperature Range	$^{\circ}\text{C}$	-30~+80