

# Speaker


## SM15S004




### DIMENSIONS

UNIT:mm

Tolerance:  $\pm 0.2$ mm

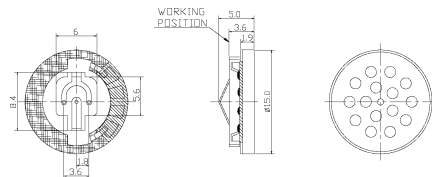

### FREQUENCY RESPONSE

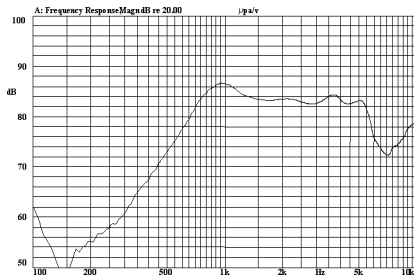

### SPECIFICATIONS

Rated Impedance	$\Omega$	$8 \pm 15\%$
Rated Input Power	W	0.5
Maximum Input Power	W	0.8
Resonant Frequency	Hz	$920 \pm 20\%$
S.P.L@0.1w/0.1m@1kHz	dB	$85 \pm 3$
Weight	g	1.3
Operating Temperature Range	$^{\circ}\text{C}$	-10~+40
Storage Temperature Range	$^{\circ}\text{C}$	-40~+80