


Speaker


SM15S013



DIMENSIONS

UNIT:mm

Tolerance:± 0.2mm

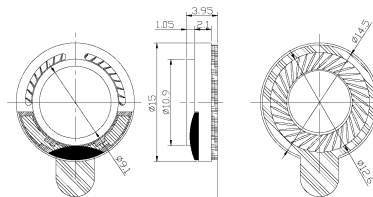

SPECIFICATIONS

| | | |
|-----------------------------|--------------------|----------------|
| Rated Impedance | Ω | $8 \pm 15\%$ |
| Rated Input Power | W | 0.3 |
| Maximum Input Power | W | 0.5 |
| Resonant Frequency | Hz | $800 \pm 20\%$ |
| S.P.L@0.1w/0.1m@1kHz | dB | 88 ± 3 |
| Weight | g | 1.4 |
| Operating Temperature Range | $^{\circ}\text{C}$ | -10~+40 |
| Storage Temperature Range | $^{\circ}\text{C}$ | -40~+80 |

FREQUENCY RESPONSE

