

Speaker


SM20S001



DIMENSIONS


UNIT:mm

Tolerance: ± 0.5 mm



SPECIFICATIONS

FREQUENCY RESPONSE

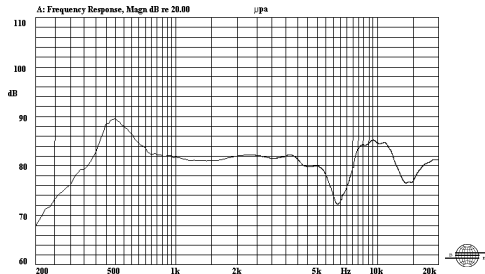

Rated Impedance	Ω	$8 \pm 15\%$
Rated Input Power	W	0.1
Maximum Input Power	W	0.2
Resonant Frequency	Hz	$500 \pm 20\%$
S.P.L@0.1w/0.1m@1kHz	dB	83 ± 3
Weight	g	2.6
Operating Temperature Range	$^{\circ}\text{C}$	-10~+40
Storage Temperature Range	$^{\circ}\text{C}$	-40~+80