SM28R002

DIMENSIONS

UNIT:mm

Tolerance: ± 0.5mm



FREQUENCY RESPONSE

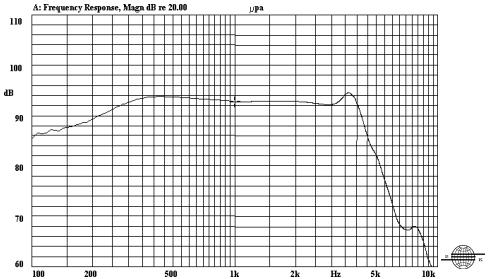

SPECIFICATIONS

Rated Impedance	Ω	150 ± 15%
Rated Input Power	mW	50
Maximum Input Power	mW	100
Rated Freq.Range	Hz	300~4000
Sensitivity	dB	93 ± 3 at 60mV
Weight	g	7.5
Operating Temperature Range	℃	-10~+40
Storage Temperature Range	℃	-30~+70